




## GERFLUID - FLEXACIER LT®

Heavy duty hose  
PVC wall and steel helix reinforcement

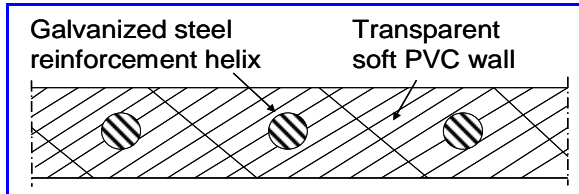

## TECHNICAL DATA

### Material :

Soft PVC wall food grade  
Steel galvanized helix

### Color :

Clear

### Printing :

Diameter +  $\Psi$

### Temperature :

-5°C / + 65°C

### Applications :

Delivery and suction of liquids for industries, agriculture, irrigation, water supply, tanker truck.

Conveyance of alcohol up to 18°

According to EU regulations

### Characteristics :

Smooth inside,  
food grade PVC, IANESCO certificate  
Very good flexibility  
Good view of the transferred material

### Special constructions :

Flexacier® STD  
Flexacier® STD SPH: without phthalate  
Flexacier® Super : food grade according to EU regulations

diameter in	diameter out	weight kg/m	bending radius mm	working pressure bar	maximum vacuum bar	Single Length m
10	16	0,160	20	11	0,90	60
12	18	0,180	25	10	0,90	60
14	20	0,205	25	10	0,90	60
16	23	0,250	30	10	0,90	60
18	25	0,300	32	8	0,85	60
20	28	0,320	35	8	0,90	60
22	29	0,380	40	8	0,85	60
25	33	0,490	42	8	0,90	60
30	38	0,600	50	6	0,90	60
32	39	0,650	53	6	0,90	60
35	44	0,700	60	6	0,90	60

Further diameters available upon request.

Technical data are based on +20°C.



PVC without Phthalate  
Conveyance of alcohol up to 18°  
According to EU regulations

Technical data contained in this document is an average of test results and do not implicate any guarantee of our part.  
We recommend our users to test the products before installation of any specific GAP hose.

Update : 08/12/2011 version 2012



GAP PLASTOMERE - ZI Sud - Chemin de Fortuneau - BP 324 - F26208 MONTELMAR CEDEX - France

Tel: +33 4 75 01 75 75 - Fax: +33 4 75 52 02 27 - www.gap-plastomere.com - info@gap-plastomere.com