




GERFLUID - FLEXACIER® SUPER

Heavy duty hose
PVC wall and steel helix coated PVC

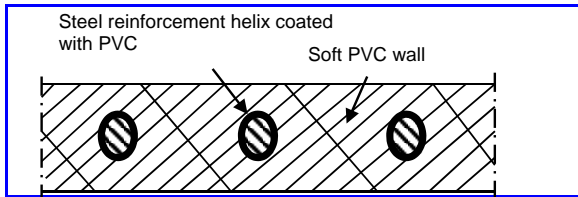

TECHNICAL DATA

Material :

Soft PVC wall **food grade according to EU regulations and without phthalate**
Spring steel wire, PVC coated

Color :

Clear

Température :

-5°C / + 60°C

Applications :

Delivery and suction of liquids for industries, agriculture, irrigation, water supply, tanker truck.
Liquids for food industries, beer, wine and alcohol up to 18%.

Caracteristics :

Smooth inside, **food grade PVC according to EU regulations - Phthalate free**
Good view of the transferred material
Very good flexibility

Special constructions :

Flexacier®
Flexacier® SPH
Flexacier® LT

diameter in	diameter out	weight kg/m	bending radius mm	working pressure bar	maximum vacuum bar	Single Length m
20	30	0,350	90	7	0,90	30
25	34	0,510	100	6	0,90	30
30	37	0,680	120	5	0,90	30
32	40	0,710	140	5	0,90	30
35	45	0,770	150	5	0,90	30
38	49	0,900	160	5	0,90	30
40	52	1,130	160	5	0,95	30
50	63	1,500	190	5	0,95	30
60	73	1,730	240	5	0,90	30
70	84	2,365	280	5	0,85	30
80	94	2,700	320	5	0,85	30
90	105	3,025	360	4	0,85	30
100	123	3,340	420	3	0,80	30
120	140	5,050	500	2	0,80	20

Further diameters available upon request.

Technical data are based on +20°C.



Soft PVC wall food grade according to EU regulations and without phthalate
IANESCO certificate
Conveyance of alcohol up to 50°

Technical data contained in this document is an average of test results and do not implicate any guarantee of our part.
We recommend our users to test the products before installation of any specific GAP hose.

Update : 08/12/2011 version 2012



GAP PLASTOMERE - ZI Sud - Chemin de Fortuneau - BP 324 - F26208 MONTEILIMAR CEDEX - France

Tel: +33 4 75 01 75 75 - Fax: +33 4 75 52 02 27 - www.gap-plastomere.com - info@gap-plastomere.com